


PS40

PULSE SPLITTER

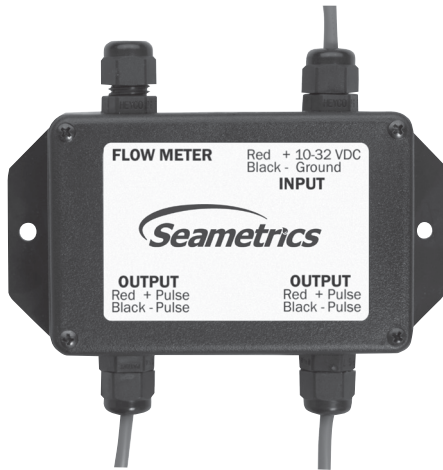

APPLICATIONS

Cooling tower/boiler water treatment

Pacing chemical metering pumps

Driving multiple pumps, counter timers, remote totalizers

Features

- Rugged ABS plastic housing
- Optoisolated Transistor and relay outputs

The **PS40** is a low-voltage device that allows a Seametrics flow sensor to drive multiple (up to four) pulse-responsive devices, such as solenoid-driven chemical metering pumps, counter timers, or remote totalizers. It requires an external DC power supply for operation and can provide power to a single low power Seametrics flow sensor, such as an MJE meter. It can also be used with a dry contact sensor, such as the MJR reed switch meter.

Contact Your Supplier



Specifications*

| | |
|----------------------|--|
| Power | 10–32 Vdc |
| Relay | Operational frequency = 50 Hz max Contacts = 250 mA max, 36 Vdc max, 3 W max. |
| Optoisolation | 10 mA max @ 30 Vdc max |
| Outputs | Three open collector optoisolated One Form C relay |
| Environmental | NEMA 4X, IP66 |

* Specifications subject to change. Please consult our website for current data. Please consult our website for current data (seametrics.com).

Dimensions

